




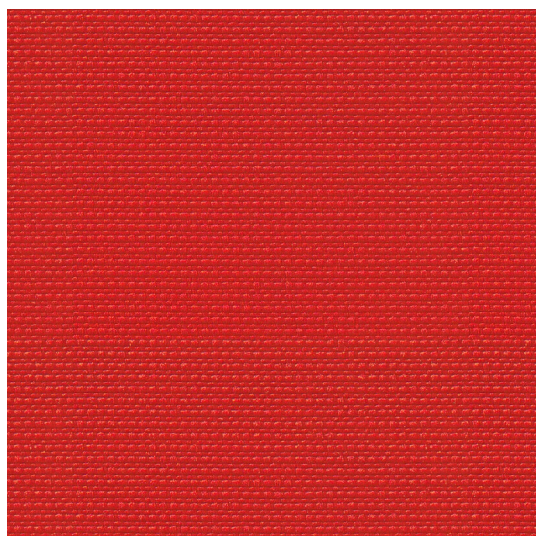


NC 075




NC 072




NC 069




NC 049




NC 074




NC 029




NC 067




NC 078




NC 046




NC 050




NC 012




NC 077




NC 076

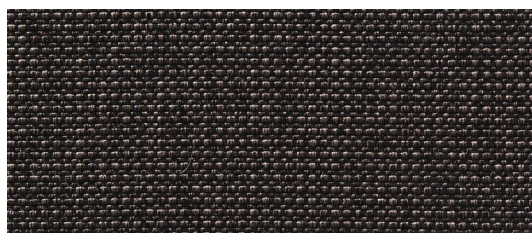

NC 550

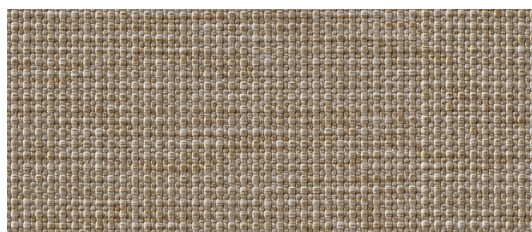

NC 549

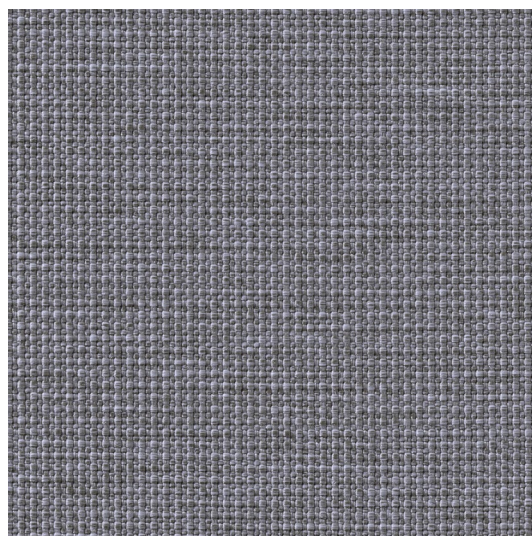

NC 546

PL

Skład
100% Poliester

Waga
366 g/m² ± 15 g

Szerokość rolki
140 cm

Odporność na ścieranie
140 000 ± 5% cykli Martindale
(PN-EN 14465: 2005/ A1:2007)

Pilling
4-5 (UNI EN ISO 12945-2:2002)

Odporność na światło
3-4 (PN - EN ISO 105-B02: 2013)

Odporność koloru na tarcie
Mokre: 4-5 (PN-EN ISO 105 X12:2005)
Suche: 4-5 (PN-EN ISO 105 X12:2005)

Certyfikaty trudnopalności
-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

DE

Zusammensetzung
100% Polyester

Gewicht
366 g/m² ± 15 g

Rollenbreite
140 cm

Scheuerfestigkeit
140 000 ± 5% Zyklen Martindale
(PN-EN 14465: 2005/ A1:2007)

Pilling
4-5 (UNI EN ISO 12945-2:2002)

Lichtechtheit
3-4 (PN - EN ISO 105-B02: 2013)

Reibechtheit
Nass: 4-5 (PN-EN ISO 105 X12:2005)
Trocken: 4-5 (PN-EN ISO 105 X12:2005)

Feuersicherung
-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

EN

Composition
100% polyester

Weight
366 g/m² ± 15 g

Roll width
140 cm

Abrasion Resistance
140 000 ± 5% Martindale cycles
(PN-EN 14465: 2005/ A1:2007)

Pilling
4-5 (UNI EN ISO 12945-2:2002)

Light Fastness
3-4 (PN - EN ISO 105-B02: 2013)

Fastness to Rubbing
Wet: 4-5 (PN-EN ISO 105 X12:2005)
Dry: 4-5 (PN-EN ISO 105 X12:2005)

Flammability
-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

