




NC 075




NC 072




NC 069




NC 049




NC 074




NC 029




NC 067




NC 078




NC 046




NC 050




NC 012




NC 077




NC 076

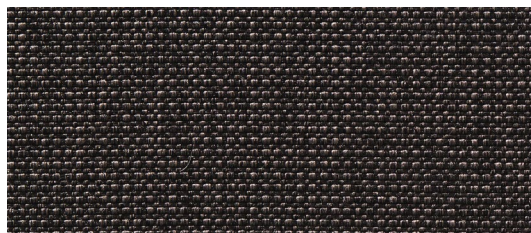

NC 550

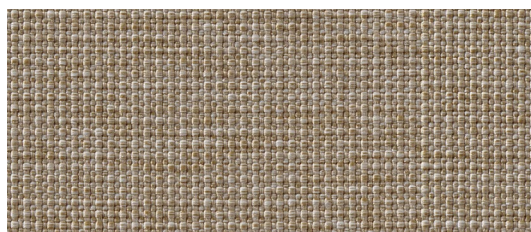

NC 549

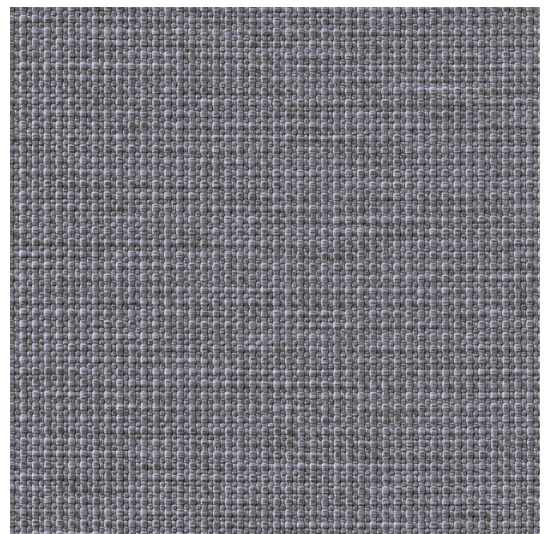

NC 546

PL**Skład**

100% Poliester

Waga

366 g/m² ± 15 g

Szerokość rolki

140 cm

Odporność na ścieranie

140,000 ± 5% cykli Martindale
(PN-EN 14465: 2005/ A1:2007)

Pilling

4-5 (UNI EN ISO 12945-2:2002)

Odporność na światło

3-4 (PN - EN ISO 105-B02: 2013)

Odporność koloru na tarcie

Mokre: 4-5 (PN-EN ISO 105 X12:2005)
Suche: 4-5 (PN-EN ISO 105 X12:2005)

Certyfikaty trudnopalności

-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

DE**Zusammensetzung**

100% Polyester

Gewicht

366 g/m² ± 15 g

Rollenbreite

140 cm

Scheuerfestigkeit

140,000 ± 5% Zyklen Martindale
(PN-EN 14465: 2005/ A1:2007)

Pilling

4-5 (UNI EN ISO 12945-2:2002)

Lichtechtheit

3-4 (PN - EN ISO 105-B02: 2013)

Reibechtheit

Nass: 4-5 (PN-EN ISO 105 X12:2005)
Trocken: 4-5 (PN-EN ISO 105 X12:2005)

Feuersicherung

-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

EN**Composition**

100% polyester

Weight

366 g/m² ± 15 g

Roll width

140 cm

Abrasion Resistance

140,000 ± 5% Martindale cycles
(PN-EN 14465: 2005/ A1:2007)

Pilling

4-5 (UNI EN ISO 12945-2:2002)

Light Fastness

3-4 (PN - EN ISO 105-B02: 2013)

Fastness to Rubbing

Wet: 4-5 (PN-EN ISO 105 X12:2005)
Dry: 4-5 (PN-EN ISO 105 X12:2005)

Flammability

-PN-EN 1021-1: 2007
-PN-EN 1021-2: 2007

