flathouse FH 4

: product card



bejot:

Four-person Flathouse booth – the perfect solution for creative meetings in open-space environments.

Flathouse is an acoustic booth designed with comfort and privacy in mind, suitable for any workspace. The use of sound-absorbing panels and high-quality materials effectively reduces external noise, creating the ideal setting for quiet conversations and brief meetings. The acoustic insulation has been optimized to both minimize excessive stimuli and dampen ambient sounds, while still allowing important signals – such as alarms – to be heard.

Acoustics

sound insulation, sound absorption

Functions

meetings, teleconferences

Spaces

open space, public areas

models

glass on one side of the booth

glass on both sides of the booth

stered panels

external uphol-



external



external uphol-



two-person sofa dedicated to FH 4



without seat (possibility of adding independent sofas)

FH 4 G1


FH 4 G1 W

FH 4 G2

FH 4 G2 W

FH SF 4

2260



<u>ښ</u>





1.A external upholstered panels

available in a variety of fabrics in a wide range of colors

- **1.B external wooden panels** oak planks in natural color
- available in a variety of fabrics in a wide range of colors
- upholstered rear wall available in a variety of fabrics in a wide range of colors
- 3.B rear wall made of acoustic safety glass
- floor
 - acoustic felt carpet, dark gray
 - o oak planks, natural color

- 5.A roof panel in upholstered booths:
 - upholstered in the color of the panels
- 5.B roof panel in wooden booths:
 - upholstered, Fabric Fenno FN009
 - o oak planks, natural colors
- 6 tabletop (1200x700) height 705 mm
 - o laminated board
 - finger joint solid oak wood
- 7 multimedia panel
 - upholstered in fabric of internal or external panels
 - preparation for 32" TV mounting
- media port

 three-module media port mounted in the multimedia panel above the tabletop

- system audio
 - audio system with mono amplifier and Bluetooth® control (mounted in an invisible place in the multimedia panel)
- frame, hinges, fittings, and handle made of metal, powder-coated in black
- occupancy system at the front and back of the booth
- cable grommets in the roof panels
 - prepared for the installation of fire safety equipment
- 2 x two-person sofas designed for a 705 mm table height

equipment



booth occupancy system (standard)

A system located at the front and back of the booth, activated by a built-in motion sensor, indicating the booth's occupancy during use. Once the fans have completed their operation and the air has been refreshed, the booth is ready for use again.



acoustic glass (standard)

Transparent, acoustic, safety glass with acoustic seals. Made of laminated glas. In the G1 version, the glass is only at the front of the booth, while in the G2 version, it is at both the front and the back. Glass thickness: 8.5 mm.



ventilation (standard)

An efficient ventilation system utilizing quiet fans with an airflow of approximately 260 m³/h. The air volume is optimized to ensure the user's comfort. The system is fully automatic and safe to use.

Ventilation function – after leaving the booth, the ventilation will continue to operate for an additional 3 minutes to ensure comfort for the next users.



ceiling lighting (standard)

Efficient, energy-saving LED lighting, automatically activated by a motion sensor, with adjustable light intensity.

Four LED lamp integrated into the ceiling panel, light color 4000 K, brightness 4x216 lm, powered by a 12 V mains connection.



touch panel (standard)

A touch panel for 4-level adjustment of ventilation and lighting, Installation location: above the tabletop or at 850 mm height from the floor if no tabletop is installed.



audio system (option)

AUDIO - Mono audio system with an amplifier and Bluetooth control, mounted in a concealed location.



leveling feet (standard)

Leveling feet that ensure stable positioning of the booth.



transport wheels (standard)

Built-in transport wheels that make moving the booth easier. Thanks to the wheels, only one person is needed to move the booth. To stabilize and level the booth, lift the transport wheels and lower the leveling feet. To adjust the feet, remove the black plugs located in the floor and use a 7 mm socket wrench or flat screwdriver to raise or lower the feet to the desired height.



preparation for TV installation (option)

TP – preparation for mounting a 32" TV: grommet, cable grommet (bracket, HDMI cable and mounting by customer).



preparation for fire protection equipment installation (option)


Prepared for the installation of fire protection devices such as speakers and sensors.

Cable pass-throughs with a diameter of 25 mm prepared in the roof panels (both internal and external).



electrical installation (standard)

Safe electrical installation. Components based on the 12 V standard. Includes a 2.5 m power cable (plug type E – Poland/France, type F – Germany, type G – United Kingdom).

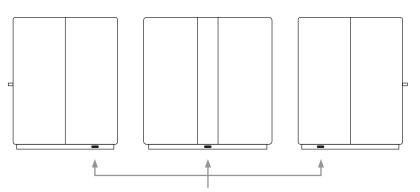

option to choose power cable exit location




media port mounted in the multimedia panel above the tabletop (option)

if there is no table, the media port is mounted at a height of 850 mm



E3VACR (option)

media port with three sockets: 230 V / USB A + C / RJ, with a power output of 22 W




E3VACH (option)

media port with three sockets: 230 V / USB A + C / HDMI, with a power output of 22 W



E3VACV (option)

media port with three sockets: 230 V / USB A + C / 230V, with a power output of 22 W



E3VACHR (option)

media port with three sockets: 230 V / USB A + C / HDMI + RJ, with a power output of 22 W





E3VACAC (option)

media port with three sockets: 230 V / USB A + C / USB A + C, with a power output of 22 W

upholstery capabilities

FH 4 G1/G2





first color of the fabric

ScW - interior walls, interior ceiling panel and multimedia panel

second color of the fabric


ScZ – exterior walls


Da – exterior roof panel

third color of the fabric

Si - seat

FH 4 G1/G2 W





first color of the fabric

ScW – interior walls, interior ceiling panel and multimedia panel ScZ – exterior wall

second color of the fabric

Da – exterior roof panel, available in Fenno FN009 fabric or optionally in wood

third color of the fabric

Si - seat

fabric application possibilities

Flathouse FH 4

1 grp.	2 grp.	3 grp.	4 grp.
fenno	alaska	ally, ally SD	oceanic SD
	alpa	alpa SD	remix SD
	charles, charles SD	blazer	
	cura	cura SD	
	pastel	cyber SD	
	roccia	easy SD	
	valencia	oceanic	
		silvertex, silvertex SD	
		synergy, synergy SD	
		valencia SD	
		client's fabric	

two-person sofa


1 grp.	2 grp.	3 grp.	4 grp.	5 grp.
fenno	alaska	ally, ally SD	oceanic SD	steelcut trio_SD
	alpa	alpa SD	remix SD	
	charles, charles SD	blazer		
	cura	cura SD		
	pastel	cyber SD		
	roccia	easy SD		
	valencia	oceanic		
		silvertex, silvertex SD		
		synergy, synergy SD		
		valencia SD		
		client's fabric		


upholstered roof panel in FH 4 W


(booth with wooden exterior panels)

Fenno FN009

dimensions, packaging and weights

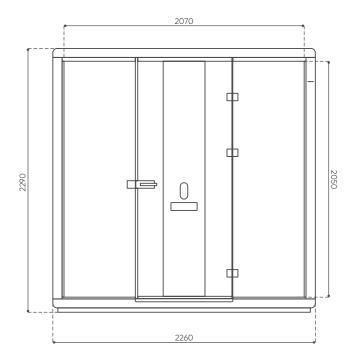


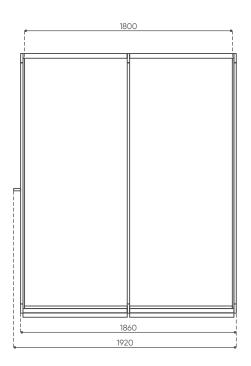




cardboard packaging no. 1 and no. 2 H: 1940 L: 2180 W: 890

kg	FH 4 G1	FH 4 G1 W	FH 4 G2	FH 4 G2 W
net weight of the product	908	998	928	1058
gross weight of carton no. 1	361	386	431	456
gross weight of carton no. 2	307	345	240	315
gross weight of carton no. 3	280	345	240	315

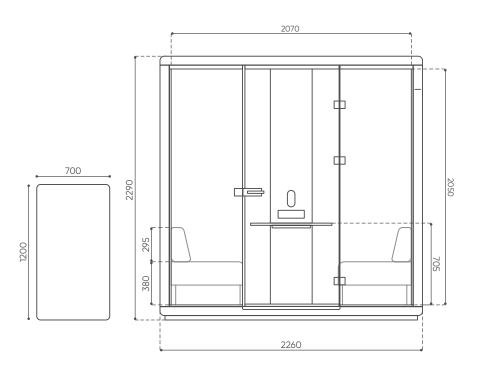



::

acoustic Information

acoustic insulation of the booth

Flathouse is an acoustic booth designed with comfort and privacy in mind for any workspace. The use of sound-absorbing panels and high-quality materials effectively reduces external noise, creating an ideal environment for quiet conversations and short meetings.

The acoustic insulation is optimized to both limit excessive stimuli and dampen ambient sounds while still allowing important signals, such as alarms, to be heard.





reduction of speech noise level

In dynamic work environments such as offices or coworking spaces, brainstorming sessions are an essential part of creativity and innovation. Unfortunately, intense discussions often disturb the peace of others nearby. Flathouse acoustic booths provide a solution by allowing even the liveliest conversations without affecting the comfort of others at work. The volume of speech inside the Flathouse booth is effectively reduced. Thanks to Flathouse booths, every team can collaborate freely without disrupting those around them.






additional acoustic surface

Flathouse acoustic booths are available in two exterior panel finishes: upholstered panels and natural oak wood boards.


The upholstered panels effectively absorb sound, improving the acoustics of the room where the booth is placed. Having an upholstered booth in an office space not only provides additional meeting space but also significantly enhances acoustic comfort.

One FH4 acoustic booth adds approximately 12 m^2 of sound-absorbing surface to the room, which is equivalent to nine Selva: free panels measuring $800 \times 1600 \text{ mm}$.

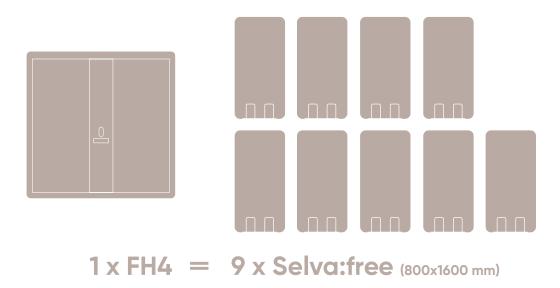

sustainable development

Flathouse booths have been designed with durability and minimal environmental impact in mind.



97%

the materials of the FH 4 G1 booth are recyclable



The FH 4 G1 model is made from materials that can be recycled after the end of their use. This is a practical way to reduce waste and give materials a second life.



less waste at the design stage

Before the final product is created, we focus on minimizing waste and selecting materials with a low environmental footprint. The booth's components are easy to disassemble and sort, facilitating further recycling.




responsible sourcing

The wooden elements used in our products come from suppliers certified by FSC or PEFC, which confirm compliance with international standards for responsible forest management, considering environmental, social, and economic factors.

material composition

The percentage of each material's mass in the Flathouse FH 4 G1 booth.

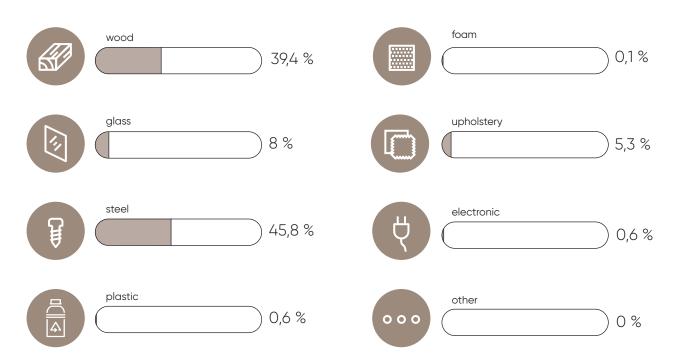

comparison of Flathouse acoustic booths

	F114	FUS	FIL /	FILE
	FH1	FH 2	FH 4	FH 6
dimensions				
external dimensions (width x height x depth)	1000 x 2290 x 1000 mm	2260 x 2290 x 1000 mm	2260 x 2290 x 1920 mm	2800 x 2290 x 2840 mm
internal dimensions (width x height x depth)	810 x 2050 x 895 mm	2070 x 2050 z 890 mm	2070 x 2050 z 1800 mm	2600 x 2050 x 2720 mm
product weight	372 kg - 421 kg (depending on version)	528 kg - 645 kg (depending on version)	908 kg - 1058 kg (depending on version)	1270 kg
glass				
available versions	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G2 – glass on both sides of the booth
ventilation				
number of fans	2	4	8	12
airflow	70 m³/h	130 m ³ /h	260 m ³ /h	360 m ³ /h
integrated lighting	yes	yes	yes	yes
lighting intensity control	yes	yes	yes	yes
number of light points	1	2	4	12
activation	automatic – motion sensor	automatic – motion sensor	automatic – motion sensor	automatic - motion sensor
lighting type	led	led	led	led
brightness	216 Lm	2 x 216 Lm	4 x 216 Lm	12 x 216 Lm
power supply	12 V	12 V	12 V	12 V
light color	4000 K	4000 K	4000 K	4000 K
multimedia panel	no	yes	yes	yes
prepared for 32" TV mounting; cable gland, cable pass-through	none	yes, option	yes, option	yes, option
touch panel for lighting and ventilation intensity control	yes, option	yes, standard	yes, standard	yes, standard
mediaport	yes, option	yes, option	yes, option	yes, option
transport wheels	yes, standard	yes, standard	yes, standard	no

ul. Wybickiego 2A, Manieczki, 63–112 Brodnica n. Poznań, POLAND tel.: +48 (61) 281 22 25, e-mail: biuro@bejot.eu www.bejot.eu