

treehouse THS 2

: product card



bejot:

treehouse THS 2

design:
Bejot Development Team

Two-person Treehouse booth designed to provide suitable conditions for quiet conversations and short meetings.

Treehouse is an acoustic booth designed with comfort and privacy in mind, suitable for any space. The sound-absorbing panels and high-quality materials effectively reduce external noise, providing ideal conditions for quiet conversations and short meetings. The acoustic insulation has been optimized to minimize excess stimuli and suppress ambient noise while still allowing the reception of essential signals, such as alarms.

Acoustic

sound insulation, sound absorption

Functions

short meetings, focused work

Spaces

open spaces, public areas

bejot:

2

models



single-seat sofa designed for TH 2




TH SF 2

freestanding stool for TH 2



XH ST

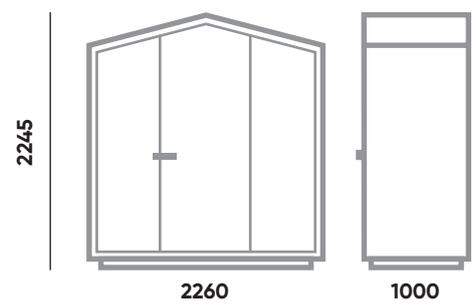



1.A external upholstered panels
available in a variety of fabrics in a wide range of colors

1.B external wooden panels
oak planks in natural color

2 internal upholstered panels
available in a variety of fabrics in a wide range of colors

3.A upholstered rear wall
available in a variety of fabrics in a wide range of colors

3.B rear wall made of acoustic safety glass

4 floor
● acoustic felt carpet, dark gray
○ oak planks, natural color

5 tabletop (700x460)
height 705 mm / 1100 mm
○ laminated board
○ finger joint solid oak wood

6 multimedia panel
● upholstered in fabric of internal panels
○ preparation for 32" TV mounting

7 media port
○ three-module media port mounted in the multimedia panel above the tabletop

8 system audio
○ audio system with mono amplifier and Bluetooth® control (mounted in an invisible place in the multimedia panel)

9 frame made of metal, powder-coated in black
● available in black or white (structure)
○ Studio Design colors

10 hinges, fittings and handle made of metal, powder-coated in black

11 occupancy system at the front and back of the booth

12 cable grommets in the roof panels
○ prepared for the installation of fire safety equipment

13 freestanding stool with height adjustment for a tabletop at 1100 mm

14 2x single-seat armchair for a tabletop at 705 mm


● standard ○ option

equipment



booth occupancy system (standard)

A system located at the front and back of the booth, activated by a built-in motion sensor, indicating the booth's occupancy during use. Once the fans have completed their operation and the air has been refreshed, the booth is ready for use again.



acoustic glass (standard)

Transparent, acoustic, and safety glass with acoustic seals. Made of laminated glass with four layers of anti-vibration film. In the event of breakage, the shards remain stuck to the film, minimizing the risk of injury. The film also serves as a sound barrier, enhancing the acoustic properties of the glass. In the G1 version, the glass is only at the front of the booth, while in the G2 version, it is at both the front and the back.

Glass thickness: 8.5 mm. Width of the tempered glass door: 810 mm.



130m³/h

ventilation (standard)

An efficient ventilation system utilizing quiet fans with an airflow of approximately 130 m³/h. The air volume is optimized to ensure the user's comfort. The system is fully automatic and safe to use.


Ventilation function – after leaving the booth, the ventilation will continue to operate for an additional 3 minutes to ensure comfort for the next users.



ceiling lighting (standard)

Efficient, energy-saving LED lighting, automatically activated by a motion sensor, with adjustable light intensity.

Two LED lamp integrated into the ceiling panel, light color 4000 K, brightness 2x216 lm, powered by a 12 V mains connection.



touch panel (option)

Touch panel for 4-level adjustment of ventilation and lighting. Installation location: above the tabletop, or at a height of 850 mm/1250 mm from the floor if no tabletop is installed.



audio system (option)

AUDIO – Mono audio system with an amplifier and Bluetooth control, mounted in a concealed location.



leveling feet (standard)

Leveling feet that ensure stable positioning of the booth.



transport wheels (standard)

Built-in transport wheels that make moving the booth easier. Thanks to the wheels, only one person is needed to move the booth. To stabilize and level the booth, lift the transport wheels and lower the leveling feet. To adjust the feet, remove the black plugs located in the floor and use a 7 mm socket wrench or flat screwdriver to raise or lower the feet to the desired height.



preparation for TV installation (option)

TP – preparation for mounting a 32" TV: grommet, cable grommet (bracket, HDMI cable and mounting by customer).




preparation for fire protection equipment installation (option)

Prepared for the installation of fire protection devices such as speakers and sensors. Cable pass-throughs with a diameter of 25 mm prepared in the roof panels (both internal and external).



electrical installation (standard)

Safe electrical installation. Components based on the 12 V standard. Includes a 2.5 m power cable (plug type E – Poland/France, type F – Germany, type G – United Kingdom).

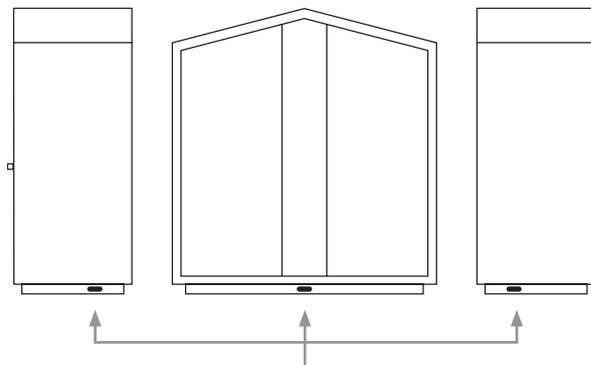


option to choose power cable exit location




media port mounted in the multimedia panel above the tabletop (option)


if there is no table, the media port is mounted at a height of 850 mm or 1250 mm




E3VACR (option)
media port with three sockets:
230 V / USB A + C / RJ, with a power output of 22 W




E3VACH (option)
media port with three sockets:
230 V / USB A + C / HDMI, with a power output of 22 W



E3VACV (option)
media port with three sockets:
230 V / 230 V / USB A + C, with a power output of 22 W




E3VACHR (option)
media port with three sockets:
230 V / USB A + C / HDMI + RJ, with a power output of 22 W



E3VACAC (option)
media port with three sockets:
230 V / USB A + C / USB A + C, with a power output of 22 W

upholstery capabilities


THS 2

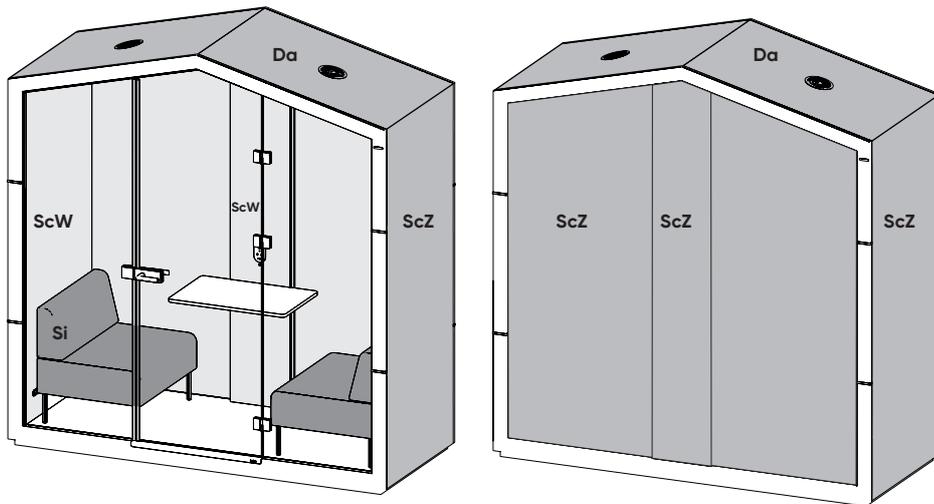

- **first color of the fabric**
ScW – interior walls, interior ceiling panel and multimedia panel
- **second color of the fabric**
ScZ – exterior wall
Da – exterior roof panel
- **third color of the fabric**
Si – seat

bejot: 6

THS 2 W

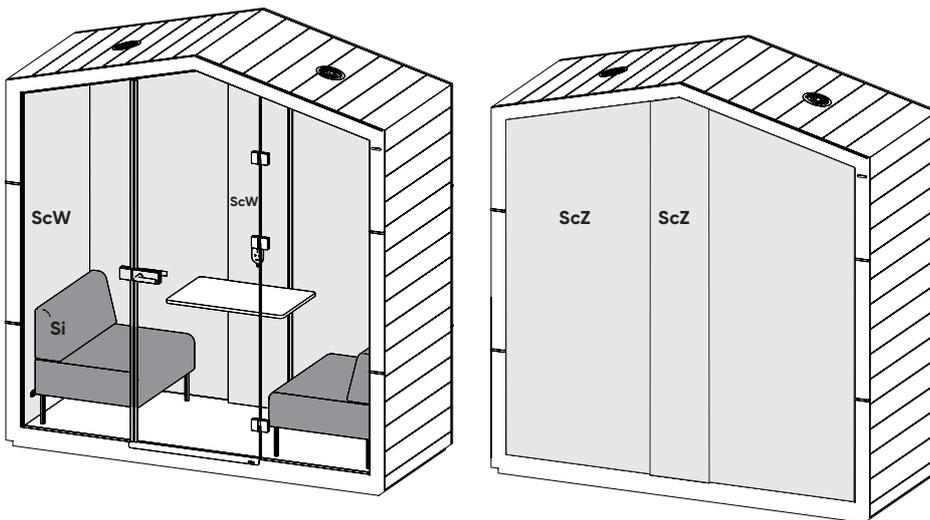

- **first color of the fabric**
ScW – interior walls, interior ceiling panel and multimedia panel
ScZ – exterior wall
- **second color of the fabric**
Si – seat

fabric application possibilities

Treehouse THS 2

1 grp.	2 grp.	3 grp.	4 grp.	5 grp.
fenno	alaska alpa charles, charles SD cura pastel roccia valencia	ally, ally SD alpa SD blazer cura SD cyber SD easy SD oceanic silvertex, silvertex SD synergy, synergy SD valencia SD client's fabric	oceanic SD remix SD	steelcut_trio SD


single-seat sofa

1 grp.	2 grp.	3 grp.	4 grp.	5 grp.
fenno	alaska alpa charles, charles SD cura pastel roccia valencia	ally, ally SD alpa SD blazer cura SD cyber SD easy SD oceanic silvertex, silvertex SD synergy, synergy SD valencia SD client's fabric	oceanic SD remix SD	steelcut trio_SD


freestanding stool

Black fabric Fidivi One 8033

dimensions, packaging and weights

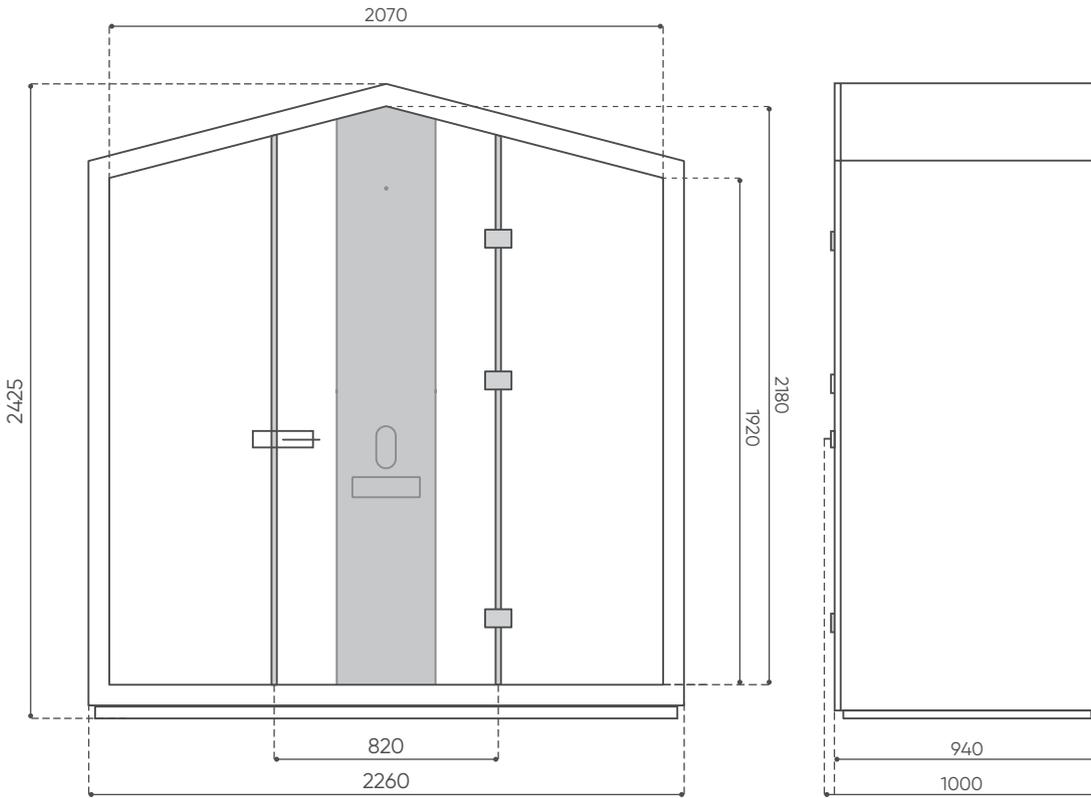

bejot: 8




cardboard packaging no. 1 and no. 2

H: 1 130
L: 2 435
W: 895



	THS 2 G1 + T	THS 2 G1 W + T	THS 2 G2 + T	THS 2 G1 W + T
net weight of the product	528	552	598	622
gross weight of carton no. 1	339	363	409	433
gross weight of carton no. 2	307	307	307	307

XH ST





H: 625
W: 405
L: 405

1 szt.
St.
pc.



net 5
gross 7

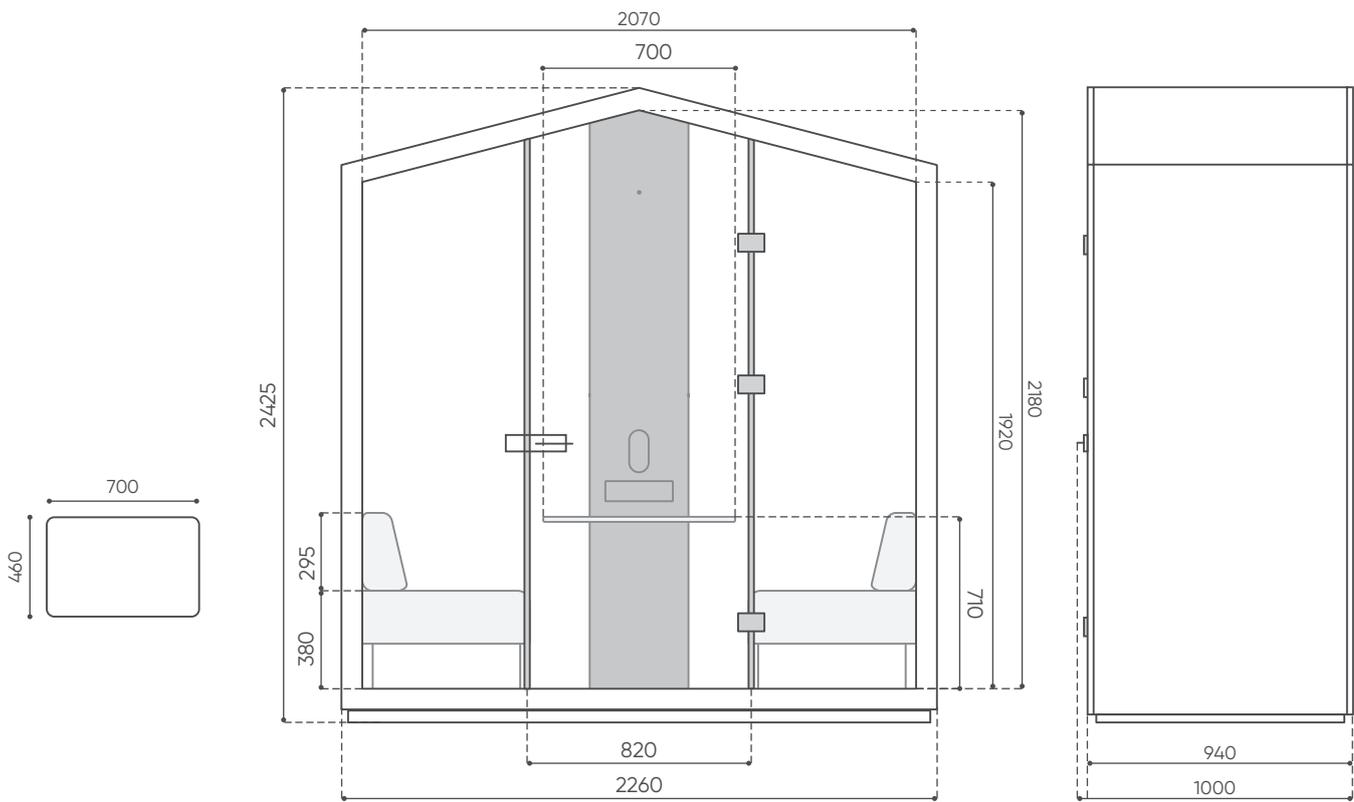

cardboard
packaging
no. 1 and no. 2

H: 1128
L: 2434
W: 892



 kg	THS 2 G1 + T + 2x XH SF	THS 2 G1 W + T + 2x XH SF	THS 2 G2 + T + 2x XH SF	THS 2 G1 W + T + 2x XH SF
net weight of the product	550	575	620	645
gross weight of carton no. 1	361	386	431	456
gross weight of carton no. 2	307	307	307	307


acoustic Information

reduction of speech noise level

according to: ISO 23351-1:2020

The noise level of a conversation held by a person inside the Flathouse booth is reduced by half (in dB), while the perceived noise reduction is up to sixfold!

This ensures the confidentiality of conversations held inside the booth.

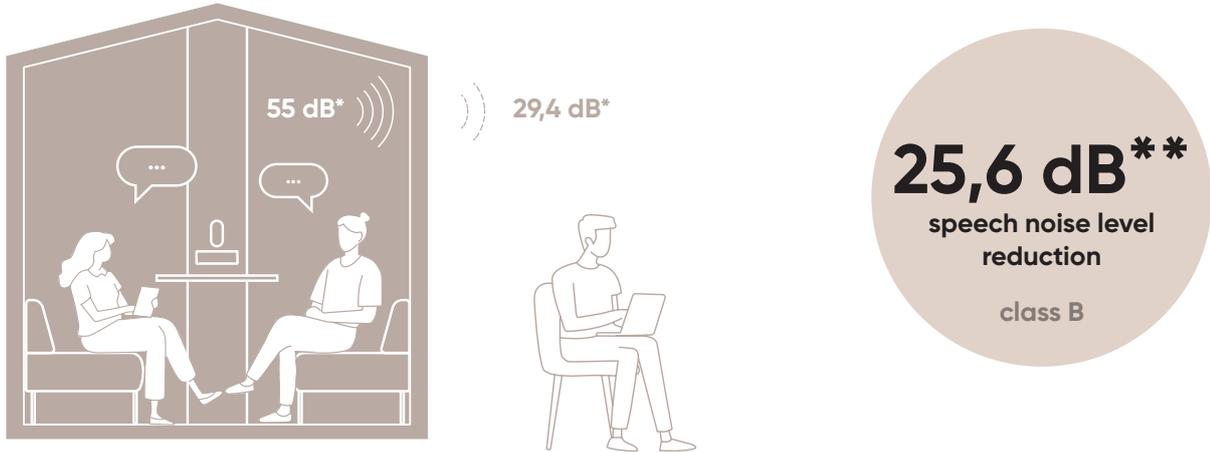

*55 dB -> 29,4 dB ≈ 6-fold reduction in perceived sound volume from inside the booth

** Research results conducted for the THS 2 G1 + 2x XH SF 2 booth.


10

bejot:

acoustic insulation of the booth

according to standards: PN-EN ISO 11957:2010 and PN-EN ISO 717-1:2013

Optimal acoustic insulation enhances comfort and work efficiency, facilitates conversations and video conferences, reduces fatigue, and limits excessive stimuli.

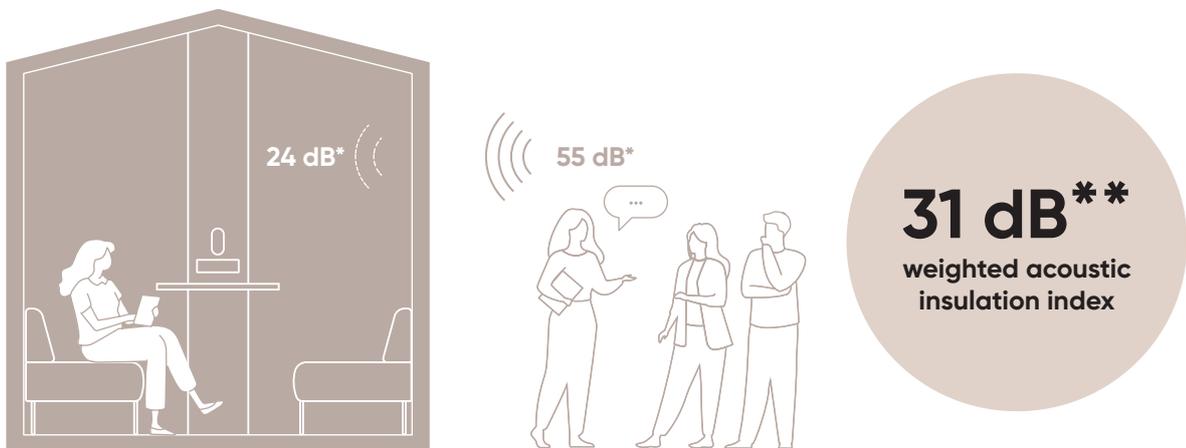

*55 dB -> 24 dB ≈ 9-fold reduction in perceived sound volume from outside the booth

** Research results conducted for the THS 2 G1 + 2x XH SF 2 booth.

sound absorption coefficient

according to standards: PN-EN ISO 11654:1999 and PN-EN ISO 354:2005


The upholstered panels of the Treehouse booth, compared to most booths on the market (typically finished with hard, highly sound-reflective materials), are filled with special acoustic felt. This material reduces the number of sound reflections in the room, thereby lowering the noise level in the office. The Treehouse acoustic booth, in its externally upholstered version, improves the acoustic conditions of the room in which it is placed. It introduces approximately 5,6 m² of sound-absorbing surface.

$$a_w = 0,65(MH)$$

sound
absorption
coefficient

sustainable development

Flathouse booths have been designed with durability and minimal environmental impact in mind.




98%

the materials of the THS 2 G2 booth are recyclable



The THS 2 G2 model is made from materials that can be recycled after the end of their use. This is a practical way to reduce waste and give materials a second life.



less waste at the design stage

Before the final product is created, we focus on minimizing waste and selecting materials with a low environmental footprint. The booth's components are easy to disassemble and sort, facilitating further recycling.



responsible sourcing

The wooden elements used in our products come from suppliers certified by FSC or PEFC, which confirm compliance with international standards for responsible forest management, considering environmental, social, and economic factors.

PEFC
PEFC/32-31-422

material composition

The percentage of each material's mass in the Treehouse THS 2 G2 booth.



wood



foam



glass



upholstery



steel



electronic



plastic



other




comparison of Treehouse acoustic booths


	THS 1	THS 2	TH 4E	TH 6
dimensions				
external dimensions (width x height x depth)	1000 x 2425 x 1000 mm	2260 x 2425 x 1000 mm	2100 x 2225 x 1635 mm	2800 x 2425 x 2840 mm
internal dimensions (width x height x depth)	810 x 2170 x 895 mm	2070 x 2180 x 895 mm	1940 x 1990 x 1510 mm	2600 x 2200 x 2720 mm
product weight	305 kg – 354 kg (depending on version)	528 kg – 645 kg (depending on version)	600 kg – 757 kg (depending on version)	1270 kg
glass				
available versions	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G1 – glass on one side of the booth G2 – glass on both sides of the booth	G2 – glass on both sides of the booth
ventilation				
number of fans	2	4	8	12
airflow	70 m ³ /h	130 m ³ /h	190 m ³ /h	360 m ³ /h
integrated lighting	yes	yes	yes	yes
lighting intensity control	yes	yes	yes	yes
number of light points	1	2	4	12
activation	automatic – motion sensor	automatic – motion sensor	automatic – motion sensor	automatic – motion sensor
lighting type	led	led	led	led
brightness	216 Lm	2 x 216 Lm	4 x 216 Lm	12 x 216 Lm
power supply	12 V	12 V	12 V	12 V
light color	4000 K	4000 K	4000 K	4000 K
multimedia panel	no	yes	yes	yes
prepared for 32" TV mounting; cable gland, cable pass-through	none	yes, option	yes, option	yes, option
touch panel for lighting and ventilation intensity control	yes, option	yes, standard	yes, standard	yes, standard
media port	yes, option	yes, option	yes, option	yes, option
transport wheels	yes, standard	yes, standard	yes, standard	no

acoustic test results

speech noise level reduction

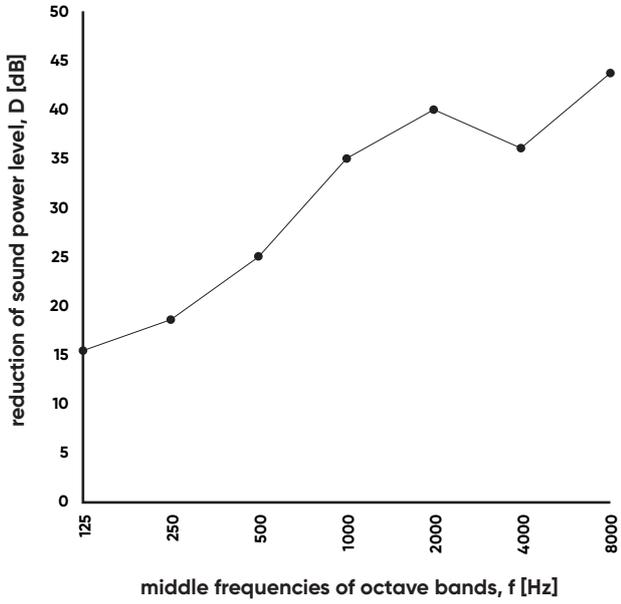


weighted acoustic insulation index

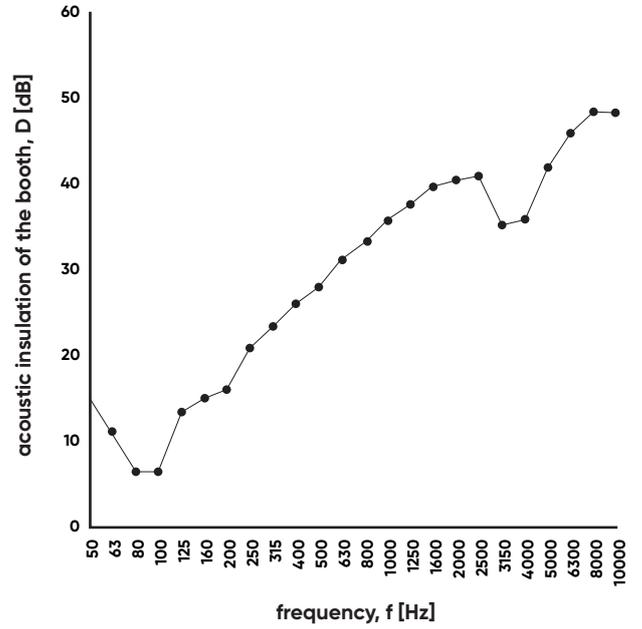

bejot: 14

Absorption of Treehouse external panels

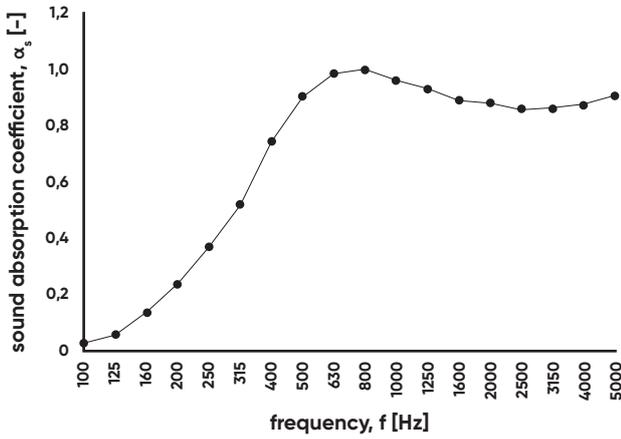

Tested parameter	Speech level reduction $D_{s,A}$	Sound insulation performance of the booth $D_{p,W}$	Sound absorption coefficient α_w
Result for Treehouse acoustic booth	25,6 dB (class B)	31 dB	0,65 (Mh)
Recommended value	≥ 25 dB	≥ 28 dB	$\geq 0,3$
Explanation	The higher the value, the less audible the conversation in the booth.	The higher the value, the better the external noise reduction.	The higher the value, the greater the noise and reverberation reduction in the room where the booth is.
Standard	ISO 23351-1:2020	PN-EN ISO 717-1:2013	PN-EN ISO 354:2005 ISO 20189:2018

The results for THS 2 G1 + 2x XH SF 2.

Bejot sp. z o.o.

ul. Wybickiego 2A, Manieczki, 63-112 Brodnica n. Poznań, POLAND

tel.: +48 (61) 281 22 25, e-mail: biuro@bejot.eu

www.bejot.eu

edition 07/2025