


# treehouse THS 1

: product card

bejot:

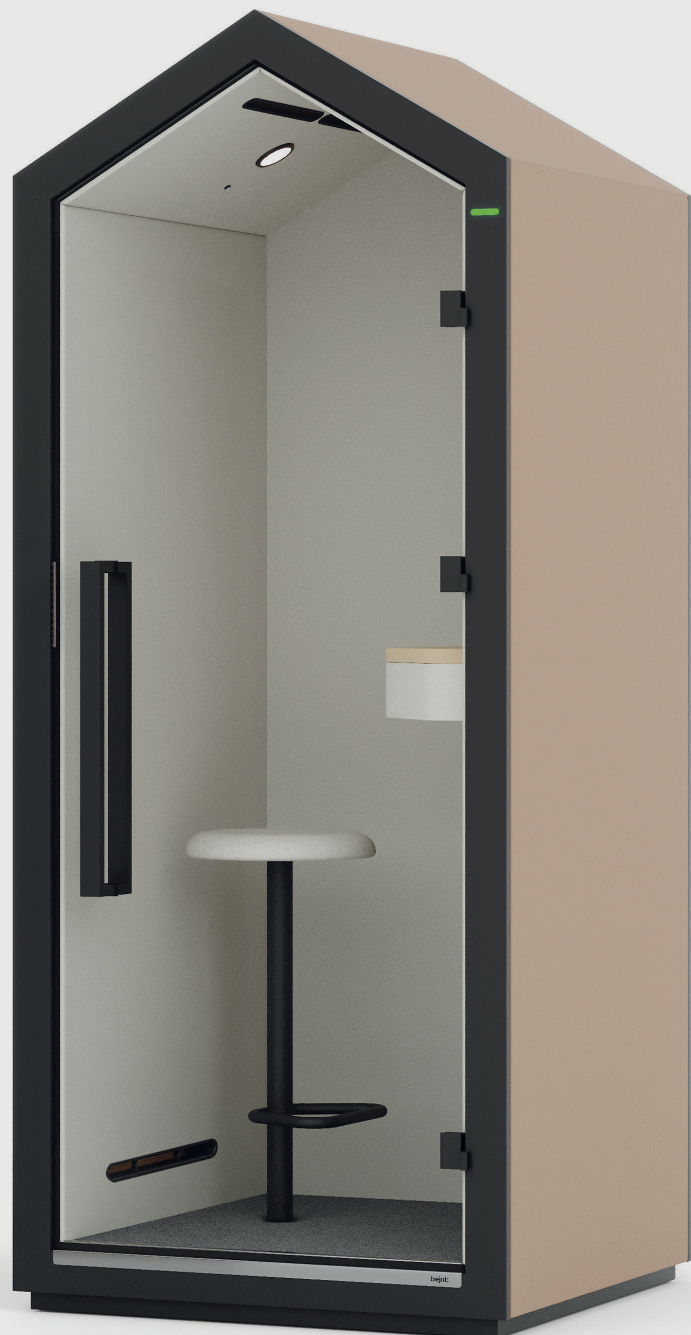

# treehouse THS 1

design:  
Bejot Development Team

Treehouse – high acoustic quality confirmed by research conducted by the AGH technical acoustics laboratory in Krakow

The Treehouse acoustic booth has been designed to provide comfort and optimal acoustics for phone calls and teleconferencing. In a noisy office, at the airport, or in a public space, it creates a dedicated area that allows for a moment of focus. It is a response to the needs of the modern world – full of hustle and noise – where people seek a moment of peace and quiet.

- Acoustics**  
sound insulation, sound absorption
- Functions**  
phone calls, online meetings
- Spaces**  
open space, public areas

## models


bejot:  
2



THS 1S G1      THS 1S G1 W      THS 1S G2      THS 1S G2 W



THS 1T G1      THS 1T G1 W      THS 1T G2      THS 1T G2 W



freestanding stool  
for THS 1T



XH ST



**1.A external upholstered panels**  
available in a variety of fabrics in a wide range of colors

**1.B external wooden panels**  
oak planks in natural color

**2 internal upholstered panels**  
available in a variety of fabrics in a wide range of colors

**3.A upholstered rear wall**  
available in a variety of fabrics in a wide range of colors

**3.B rear wall made of acoustic safety glass**

**4 floor**  
• acoustic felt carpet, dark gray  
○ oak planks, natural color

**5 tabletop (805x290)**  
height 1100 mm  
• laminated board basic colors  
○ laminated board Studio Design colors  
○ finger joint solid oak wood

**6 mediaport**  
○ PIX mediaport installed in an upholstered shelf (option to include one or two mediaports)

**7 induction charger**  
○ IC – induction charger mounted in the tabletop

**8 tablet stand**  
○ TS – black tablet/phone stand (an integral part of the tabletop)

**9 frame made of metal, powder-coated in black**  
• available in black or white (structure)  
○ Studio Design colors

**10 hinges, fittings and handle made of metal, powder-coated in black**

**11 occupancy system at the front and back of the booth**

**12 cable grommets in the roof panels**  
○ prepared for the installation of fire safety equipment

**13 freestanding stool with height adjustment**

**14 stool permanently mounted to the floor**

• standard    ○ option

## equipment



### booth occupancy system (standard)

A system located at the front and back of the booth, activated by a built-in motion sensor, indicating the booth's occupancy during use. Once the fans have completed their operation and the air has been refreshed, the booth is ready for use again.



### acoustic glass (standard)

Transparent, acoustic, and safety glass with acoustic seals. Made of laminated glass with four layers of anti-vibration film. In the event of breakage, the shards remain stuck to the film, minimizing the risk of injury. The film also serves as a sound barrier, enhancing the acoustic properties of the glass. In the G1 version, the glass is only at the front of the booth, while in the G2 version, it is at both the front and the back.

Glass thickness: 8.5 mm. Width of the tempered glass door: 824 mm.



70m<sup>3</sup>/h

### ventilation (standard)

An efficient ventilation system utilizing quiet fans with an airflow of approximately 70 m<sup>3</sup>/h. The air volume is optimized to ensure the user's comfort. The system is fully automatic and safe to use.


**Ventilation function** – after leaving the booth, the ventilation will continue to operate for an additional 3 minutes to ensure comfort for the next users.



### ceiling lighting (standard)

Efficient, energy-saving LED lighting, automatically activated by a motion sensor, with adjustable light intensity.

One LED lamp integrated into the ceiling panel, light color 4000 K, brightness 216 Lm, powered by a 12 V mains connection.



### touch panel (option)

A touch panel for 4-level adjustment of ventilation and lighting. Installation location: above the shelf.



### tablet/phone stand (option)

A black stand for a tablet/phone (integrated into the desk)



### leveling feet (standard)

Leveling feet that ensure stable positioning of the booth.



### transport wheels (standard)

Built-in transport wheels that make moving the booth easier. Thanks to the wheels, only one person is needed to move the booth. To stabilize and level the booth, lift the transport wheels and lower the leveling feet. To adjust the feet, remove the black plugs located in the floor and use a 7 mm socket wrench or flat screwdriver to raise or lower the feet to the desired height.




### preparation for fire protection equipment installation (option)

Prepared for the installation of fire protection devices such as speakers and sensors.  
Cable pass-throughs with a diameter of 25 mm prepared in the roof panels (both internal and external).



### electrical installation (standard)

Safe electrical installation. Components based on the 12 V standard. Includes a 2.5 m power cable (plug type E – Poland/France, type F – Germany, type G – United Kingdom).

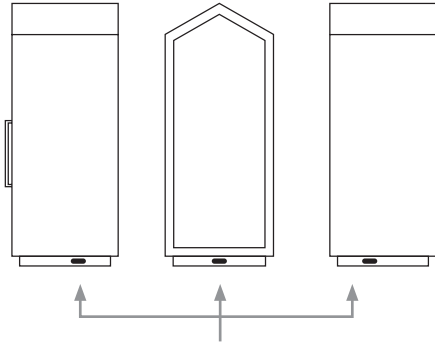

option to choose power cable exit location



### media port installed in the upholstered shelf (option)

Option to install one or two media ports.



#### **EIV** (option)

Round PIX media port (black-B) with one 230 V power socket, 22 W power rating.



#### **M1AC** (option)

Round PIX media port (black-B) with USB A+C sockets, 22 W power rating.




### wireless charger (option)

Wireless charger mounted in the desk


# upholstery capabilities

## THS 1 G1/G2

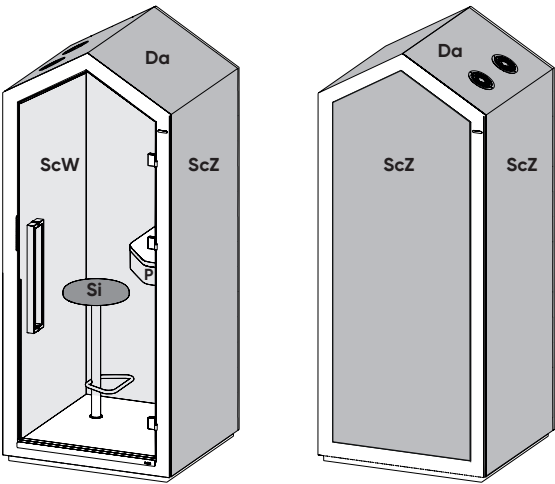

- first color of the fabric**  
ScW – internal walls and ceiling panel (interior)  
P – shelf
- second color of the fabric**  
ScZ – external walls  
Da – roof panel (external)
- third color of the fabric**  
Si – seat

## THS 1 G1/G2 W

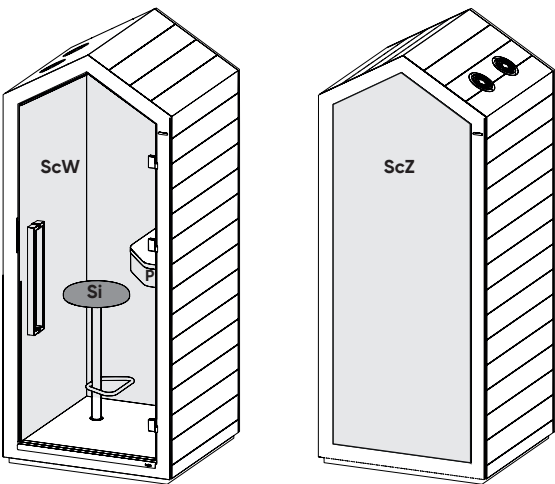

- first color of the fabric**  
ScW – internal walls and ceiling panel (interior)  
ScZ – external wall  
P – shelf
- second color of the fabric**  
Si – seat

fabric application possibilities


Treehouse THS 1

| 1 grp. | 2 grp.                                                                        | 3 grp.                                                                                                                                                              | 4 grp.                 | 5 grp.           |
|--------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------|
| fenno  | alaska<br>alpa<br>charles, charles SD<br>cura<br>pastel<br>roccia<br>valencia | ally, ally SD<br>alpa SD<br>blazer<br>cura SD<br>cyber SD<br>easy SD<br>oceanic<br>silvertex, silvertex SD<br>synergy, synergy SD<br>valencia SD<br>client's fabric | oceanic SD<br>remix SD | steelcut_trio SD |

freestanding barstool


Black fabric Fidivi One 8033

dimensions, packaging and weights

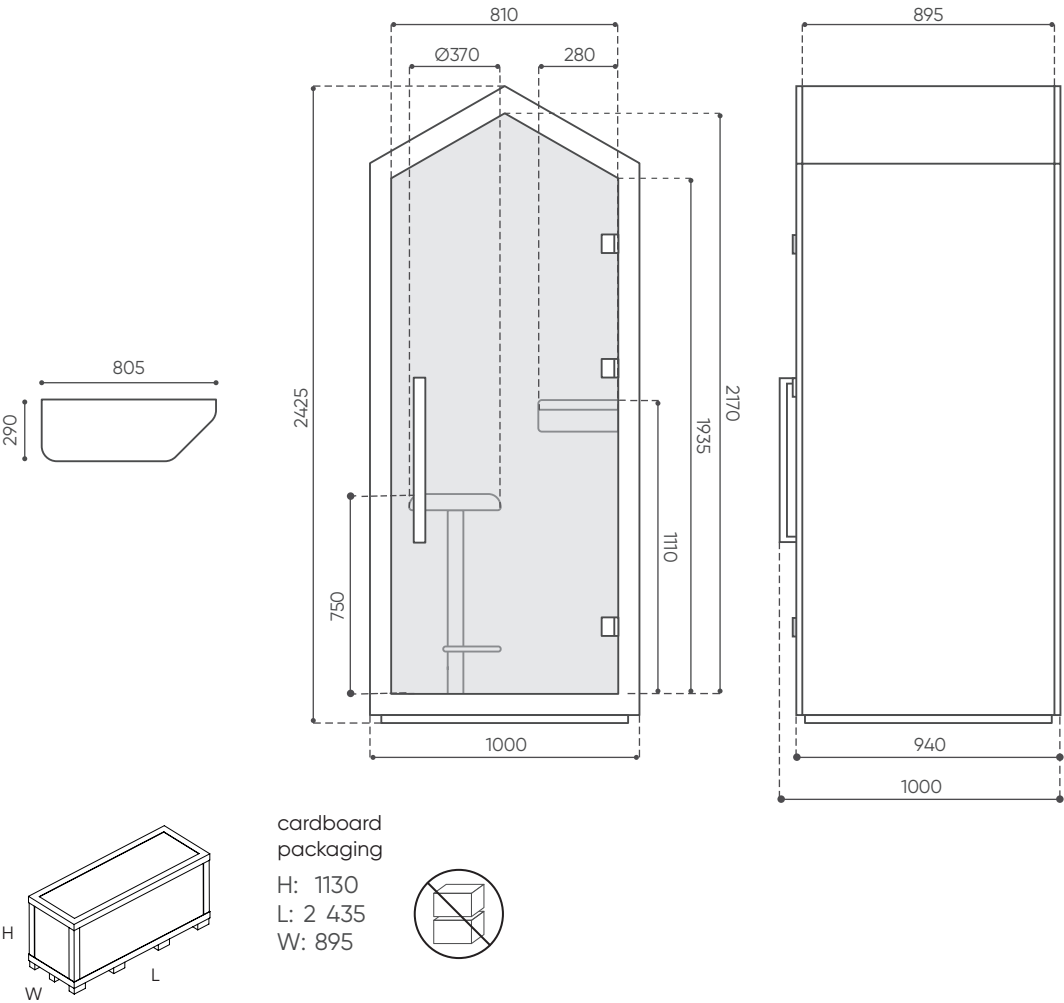

|                             | THS 1S G1 | THS 1T G1 | THS 1S G1 W | THS 1T G1 W | THS 1S G2 | THS 1T G2 | THS 1S G2 W | THS 1T G2 W |
|-----------------------------|-----------|-----------|-------------|-------------|-----------|-----------|-------------|-------------|
| net weight of the product   | 330       | 305       | 330         | 305         | 354       | 319       | 344         | 319         |
| gross weight of the product | 397       | 372       | 397         | 372         | 421       | 386       | 411         | 386         |

## XH ST

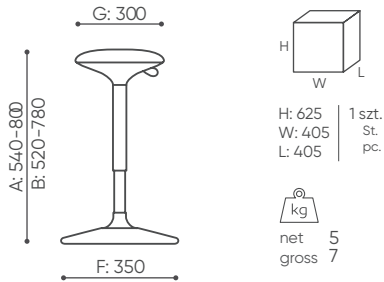


## acoustic information

### reduction of speech noise level

according to: ISO 23351-1:2020


The noise level of a conversation held by a person inside the Treehouse booth is reduced by nearly half (in dB), while the perceived reduction in loudness is up to eight times greater! This ensures the confidentiality of conversations held inside the booth.

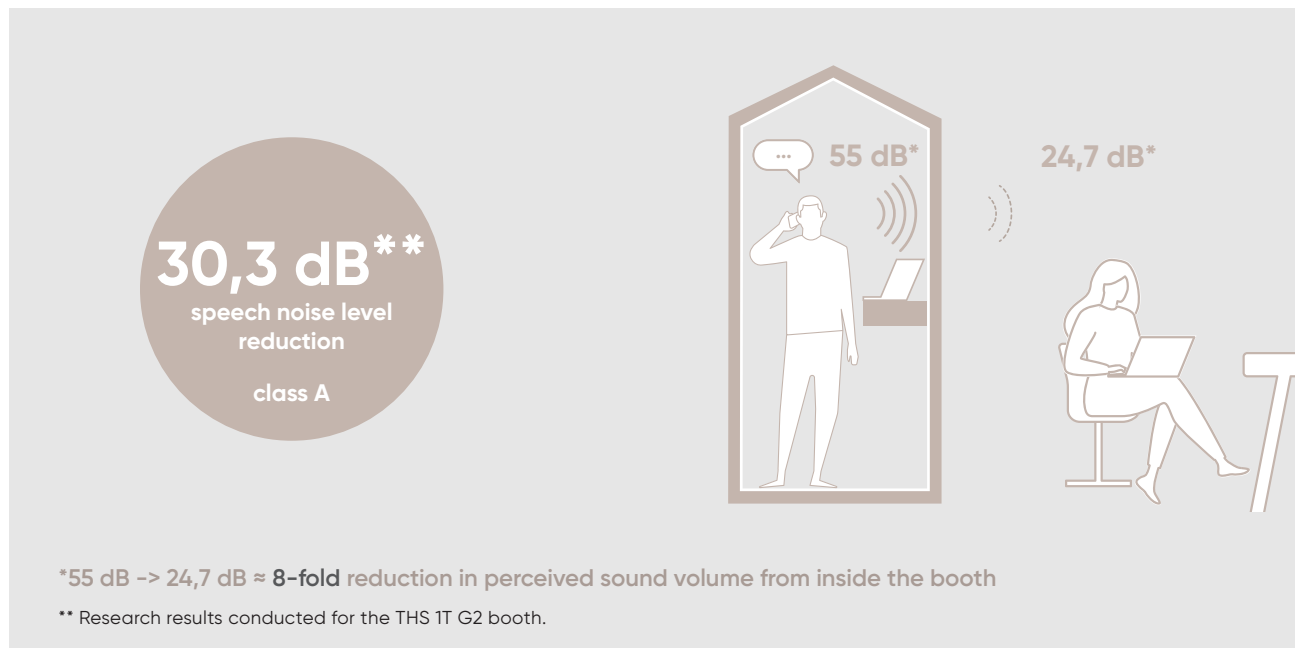

## acoustic insulation of the booth

according to standards: PN-EN ISO 717-1:2020


Optimal acoustic insulation enhances comfort and work efficiency, facilitates conversations and video conferences, reduces fatigue, and limits excessive stimuli.

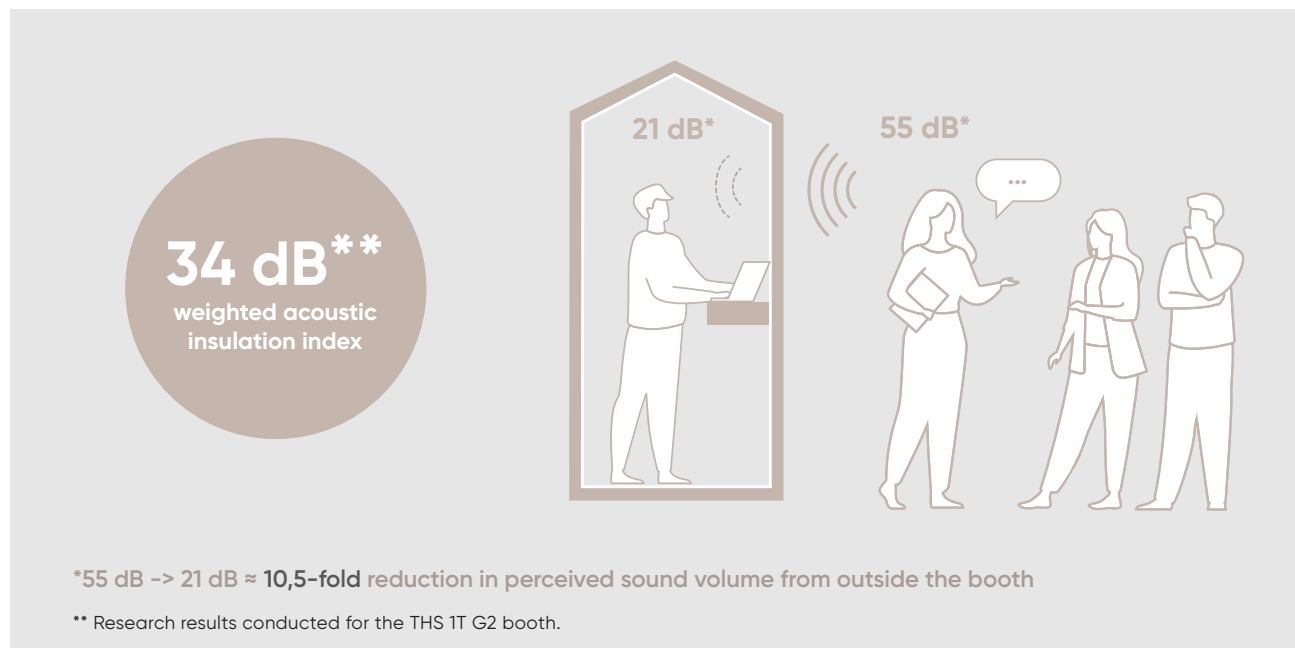

## sound absorption coefficient


according to standards: PN-EN ISO 11654:1999 and PN-EN ISO 354:2005

The upholstered panels of the Flathouse booth, compared to most booths on the market (typically finished with hard, highly sound-reflective materials), are filled with special acoustic felt. This material reduces the number of sound reflections in the room, thereby lowering the noise level in the office. The Flathouse acoustic booth, in its externally upholstered version, improves the acoustic conditions of the room in which it is placed. It introduces approximately 4,5 m<sup>2</sup> of sound-absorbing surface

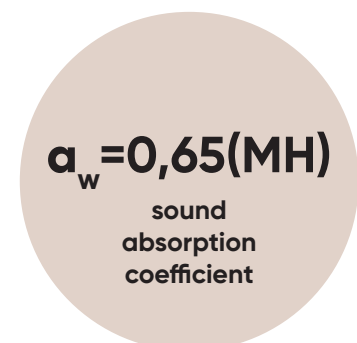

# sustainable development

Treehouse booths have been designed with durability and minimal environmental impact in mind.




# 97%

the materials of the THS 1S G2 booth are recyclable



The THS 1S G2 model is made from materials that can be recycled after the end of their use. This is a practical way to reduce waste and give materials a second life.



## less waste at the design stage

Before the final product is created, we focus on minimizing waste and selecting materials with a low environmental footprint. The booth's components are easy to disassemble and sort, facilitating further recycling.




## responsible sourcing

The wooden elements used in our products come from suppliers certified by FSC or PEFC, which confirm compliance with international standards for responsible forest management, considering environmental, social, and economic factors.

# material composition

The percentage of each material's mass in the Treehouse THS 1S G2 booth.

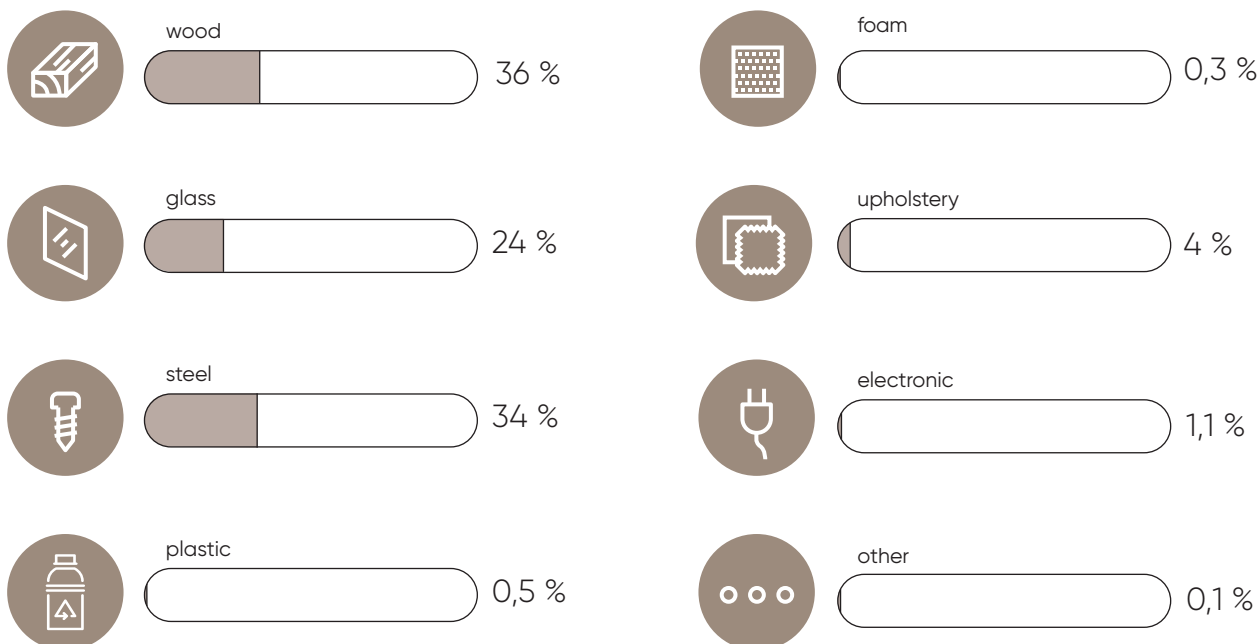


# comparison of Treehouse acoustic booths


|                                                                     | THS 1                                                                              | THS 2                                                                              | TH 4E                                                                              | TH 6                                     |
|---------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------|
| <b>dimensions</b>                                                   |                                                                                    |                                                                                    |                                                                                    |                                          |
| external dimensions<br>(width x height x depth)                     | 1000 x 2425 x 1000 mm                                                              | 2260 x 2425 x 1000 mm                                                              | 2100 x 2225 x 1635 mm                                                              | 2800 x 2425 x 2840 mm                    |
| internal dimensions<br>(width x height x depth)                     | 770 x 2150 x 895 mm                                                                | 2030 x 2160 x 895 mm                                                               | 1900 x 1970 x 1510 mm                                                              | 2600 x 2200 x 2720 mm                    |
| <b>product weight</b>                                               | 346 kg – 395 kg<br>(depending on version)                                          | 528 kg – 645 kg<br>(depending on version)                                          | 600 kg – 757 kg<br>(depending on version)                                          | 1270 kg                                  |
| <b>glass</b>                                                        |                                                                                    |                                                                                    |                                                                                    |                                          |
| available versions                                                  | G1 – glass on one side<br>of the booth<br>G2 – glass on both sides<br>of the booth | G1 – glass on one side<br>of the booth<br>G2 – glass on both sides<br>of the booth | G1 – glass on one side<br>of the booth<br>G2 – glass on both sides<br>of the booth | G2 – glass on both sides<br>of the booth |
| <b>ventilation</b>                                                  |                                                                                    |                                                                                    |                                                                                    |                                          |
| number of fans                                                      | 2                                                                                  | 4                                                                                  | 8                                                                                  | 12                                       |
| airflow                                                             | 70 m³/h                                                                            | 130 m³/h                                                                           | 190 m³/h                                                                           | 360 m³/h                                 |
| <b>integrated lighting</b>                                          |                                                                                    |                                                                                    |                                                                                    |                                          |
| lighting intensity<br>control                                       | yes                                                                                | yes                                                                                | yes                                                                                | yes                                      |
| number of light points                                              | 1                                                                                  | 2                                                                                  | 4                                                                                  | 12                                       |
| activation                                                          | automatic –<br>motion sensor                                                       | automatic –<br>motion sensor                                                       | automatic –<br>motion sensor                                                       | automatic –<br>motion sensor             |
| lighting type                                                       | led                                                                                | led                                                                                | led                                                                                | led                                      |
| brightness                                                          | 216 Lm                                                                             | 2 x 216 Lm                                                                         | 4 x 216 Lm                                                                         | 12 x 216 Lm                              |
| power supply                                                        | 12 V                                                                               | 12 V                                                                               | 12 V                                                                               | 12 V                                     |
| light color                                                         | 4000 K                                                                             | 4000 K                                                                             | 4000 K                                                                             | 4000 K                                   |
| <b>multimedia panel</b>                                             |                                                                                    |                                                                                    |                                                                                    |                                          |
| prepared for 32" TV<br>mounting; cable gland,<br>cable pass-through | no                                                                                 | yes                                                                                | yes                                                                                | yes                                      |
| touch panel for lighting<br>and ventilation intensity<br>control    | none                                                                               | yes, option                                                                        | yes, option                                                                        | yes, option                              |
| media port                                                          | yes, option                                                                        | yes, standard                                                                      | yes, standard                                                                      | yes, standard                            |
| transport wheels                                                    | yes, option                                                                        | yes, option                                                                        | yes, option                                                                        | yes, option                              |
|                                                                     | yes, standard                                                                      | yes, standard                                                                      | yes, standard                                                                      | no                                       |

# acoustic test results


speech noise level reduction

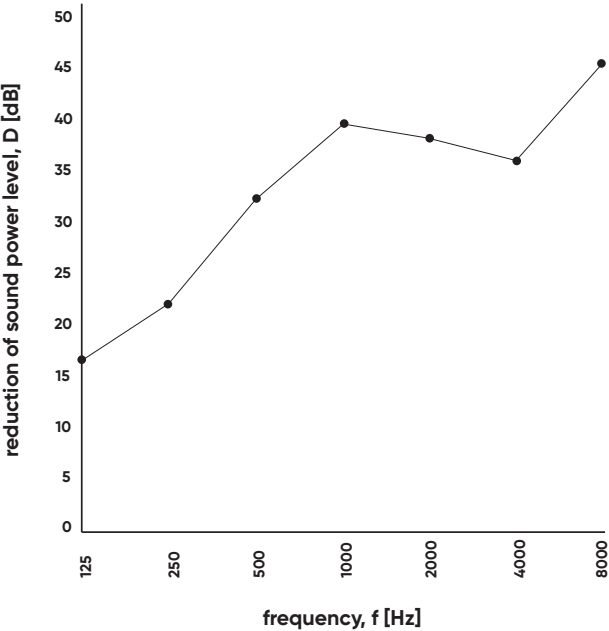

weighted acoustic insulation index

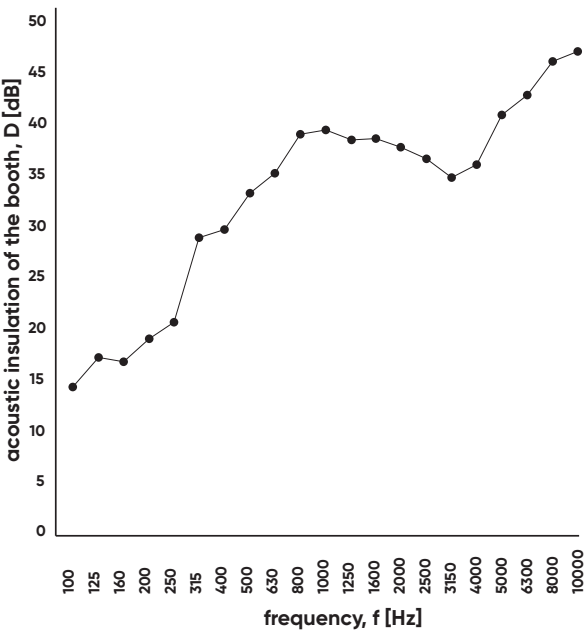

absorption of Treehouse external panels

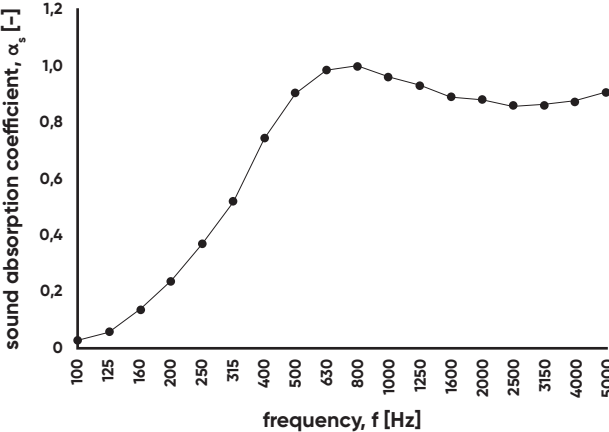

| Tested parameter                           | Speech level reduction<br>$D_{S,A}$                                   | Sound insulation performance<br>of the booth $D_{p,W}$         | Sound absorption coefficient<br>$\alpha_w$                                                              |
|--------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Result for Treehouse acoustic booth</b> | 30,3 dB<br>(A class)                                                  | 34 dB                                                          | 0,65 (Mh)                                                                                               |
| <b>Recommended value</b>                   | $\geq 25$ dB                                                          | $\geq 28$ dB                                                   | $\geq 0,3$                                                                                              |
| <b>Explanation</b>                         | The higher the value, the less audible the conversation in the booth. | The higher the value, the better the external noise reduction. | The higher the value, the greater the noise and reverberation reduction in the room where the booth is. |
| <b>Standard</b>                            | ISO 23351-1:2020                                                      | PN-EN ISO 717-1:2020                                           | PN-EN ISO 354:2005<br>ISO 20189:2018                                                                    |

The results for Treehouse THS 1T G2.

**Bejot sp. z o.o.**

ul. Wybickiego 2A, Manieczki, 63-112 Brodnica n. Poznań, POLAND

tel.: +48 (61) 281 22 25, e-mail: [biuro@bejot.eu](mailto:biuro@bejot.eu)

[www.bejot.eu](http://www.bejot.eu)

edition 07/2025